

299-E26-58 (A6651) Log Data Report

Borehole Information:

Borehole:	299-E26-58 (A66	S51)	Site:	216-A-24 Crib	
Coordinates	(WA St Plane)	GWL ¹ (ft):	None	GWL Date:	09/13/05
North	East		Top of casing		
(m)	(m)	Drill Date	Elevation (ft)	Total Depth (ft)	Type
136353.580	575743.201	07/83	652.57	41	Cable

Casing Information:

		Outer Diameter	Inside Diameter	Thickness		
Casing Type	Stickup (ft)	(in.)	(in.)	(in.)	Top (ft)	Bottom (ft)
Welded Steel	4.05	6 5/8	6 1/8	1/4	4.05	41

Borehole Notes:

Casing diameter and casing stickup measurements were acquired by the logging engineer using a caliper and steel tape. Measurements were rounded to the nearest 1/16 in.

Logging Equipment Information:

Logging System:	Gamma 1E		Type:	SGLS (70%) SN: 34TP40587A
Effective Calibration Date:	04/12/05	Calibration Reference:	DOE/EM-C	GJ864-2005
		Logging Procedure:	MAC-HGL	P 1.6.5, Rev. 0

Spectral Gamma Logging System (SGLS) Log Run Information:

Log Run	1	2 Repeat	
Date	09/15/05	09/15/05	
Logging Engineer	Spatz	Spatz	
Start Depth (ft)	40.5	13.5	
Finish Depth (ft)	4.5	8.5	
Count Time (sec)	100	100	
Live/Real	R	R	
Shield (Y/N)	N	N	
MSA Interval (ft)	1.0	1.0	
ft/min	N/A ²	N/A	
Pre-Verification	AE110CAB	AE110CAB	
Start File	AE110000	AE110037	
Finish File	AE110036	AE110042	
Post-Verification	AE110CAA	AE110CAA	

Log Run	1	2 Repeat		
Depth Return Error	0	0		
(in.)				
Comments	No fine gain	No fine gain		
	adjustment.	adjustment.		

Logging Operation Notes:

Logging was conducted with a centralizer on the sonde. Logging data acquisition is referenced to the top of casing (TOC). A repeat section was collected in this borehole to evaluate system performance.

Analysis Notes:

Analyst: Her	nwood Date:	10/10/05	Reference:	GJO-HGLP 1.6.3, Rev. 0
--------------	--------------------	----------	------------	------------------------

Pre-run and post-run verifications for the logging system were performed before and after the day's data acquisition. The acceptance criteria were met.

A casing correction for 0.25-in.-thick casing was applied to the log data.

SGLS spectra were processed in batch mode using APTEC SUPERVISOR to identify individual energy peaks and determine count rates. Concentrations were calculated with an EXCEL worksheet template identified as G1EMar05.xls using efficiency functions and corrections for casing, water, and dead time as determined from annual calibrations. No corrections for dead time or water were necessary.

Log Plot Notes:

Separate log plots are provided for the man-made radionuclide (¹³⁷Cs) detected in the borehole, naturally occurring radionuclides (⁴⁰K, ²³⁸U, ²³²Th [KUT]), a combination of man-made, KUT, total gamma, and dead time, and total gamma plotted with dead time. For each radionuclide, the energy value of the spectral peak used for quantification is indicated. Unless otherwise noted, all radionuclides are plotted in picocuries per gram (pCi/g). The open circles indicate the minimum detectable level (MDL) for each radionuclide. Error bars on each plot represent error associated with counting statistics only and do not include errors associated with the inverse efficiency function, dead time correction, casing corrections, or water corrections.

Results and Interpretations:


¹³⁷Cs was the man-made radionuclide detected in this borehole. ¹³⁷Cs was detected from the ground surface to 13.5 ft. The maximum concentration was measured at approximately 0.7 pCi/g at 4.5 ft.

The repeat section indicates good agreement of the naturally occurring KUT and ¹³⁷Cs concentrations.


¹ GWL – groundwater level

² N/A – not applicable


299-E26-58 (A6651) Man-Made Radionuclides

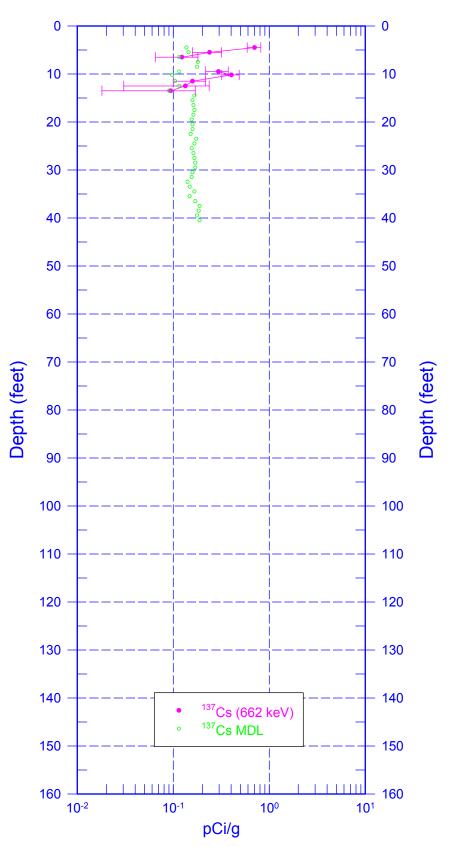


299-E26-58 (A6651) Natural Gamma Logs

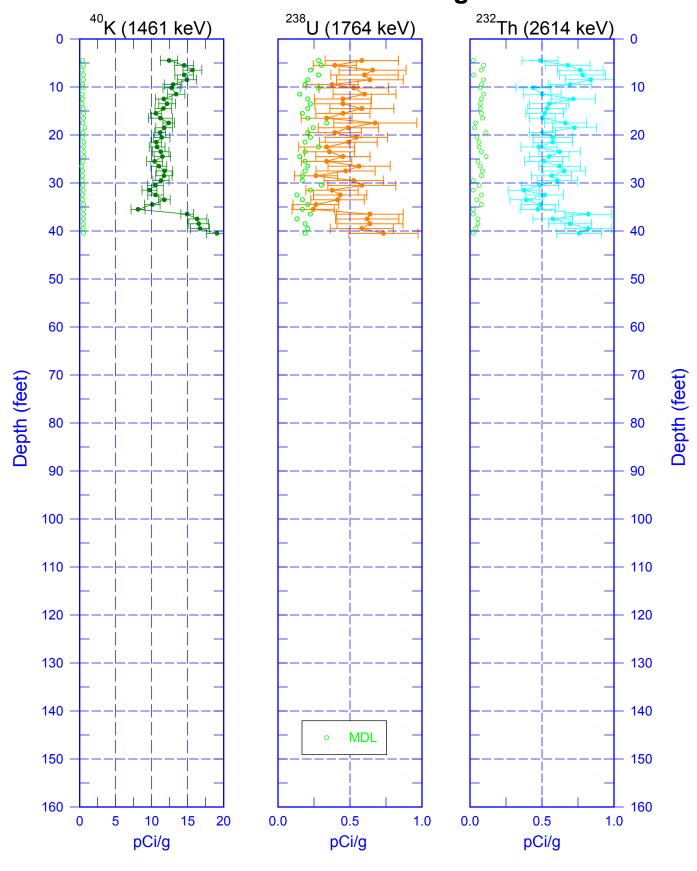


299-E26-58 (A6651) Combination Plot

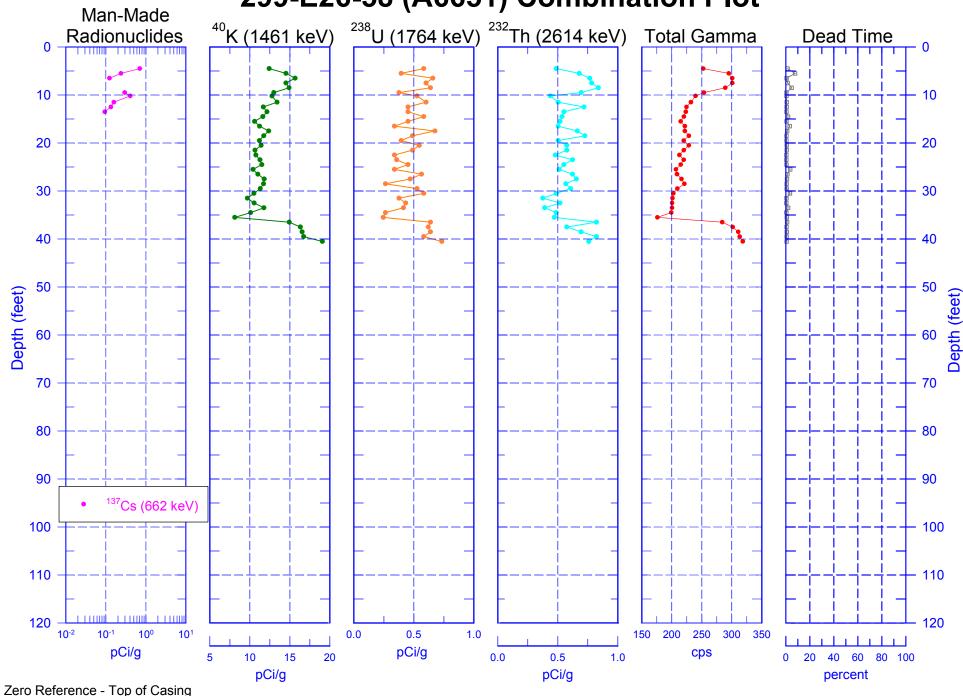


299-E26-58 (A6651) Total Gamma & Dead Time

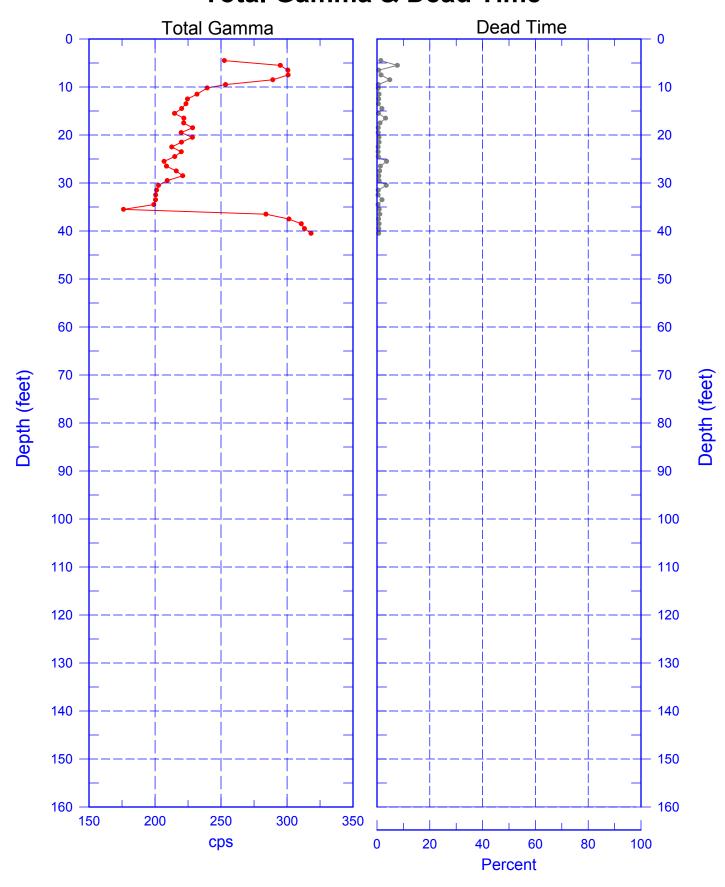

299-E26-58 (A6651) Repeat Section of Natural Gamma Logs

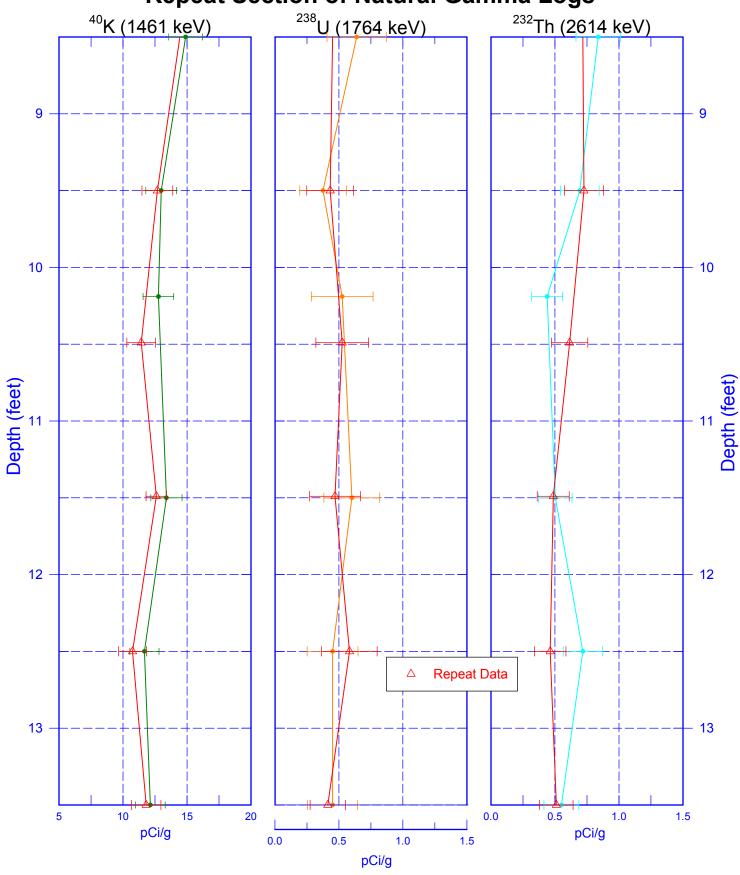

299-E26-58 (A6651) Repeat of Man-Made Radionuclides

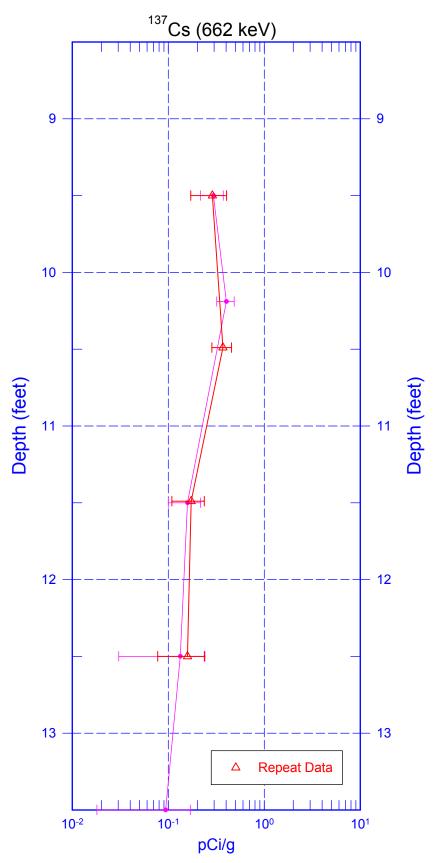

299-E26-53 (A6646) SGLS & RLS Comparison

